



The Advance Xitanium Basic Programming Driver offers an optimal balance between performance and ease of use to provide an LED solution for indoor lighting applications. Key features include an adjustable output current, 1% min. dim levels and High efficiency design. Programmable features are supported by SimpleSet wireless tools and MultiOne software. Standardized Mechanicals and enhanced thermal performance allow easy transitions between product families.


### Specifications

Input Volt. (Vac)	Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load and 75°C Case (%)	Max Case Temp. (°C)	Input Current (A)	Max. Input Power (W)	THD @ Max Load (%)	Power Factor @ Max Load	Surge Protection (Ring Wave, KV)	Envir. Protection Rating	Dimming	Dimming Range (with specified dimmers)	Min. Output Current (A)	Driver Type
120	75	20 – 48 Class 2 Output	0.1 – 2.0	87	Life-80°C UL-85°C	0.73	90.5	<15%	>0.90	2.5	UL damp & dry	0-10V Analog Class 2 Wiring Only	1% – 100% (Constant Current)	0.01	Constant Current
277				88.5		0.31		<15%							


### Enclosure

	In. (mm)	Tolerance
Overall Length (A1)	14.17(359.8)	± 0.5mm
Mounting Length (A2)	13.78(350)	± 0.5mm
Case Length (A3)	11.87(301.5)	± 0.5mm
Case Width (B1)	1.18(29.4)	± 0.5mm
Case Height (C1)	1.0(25.4)	± 1.0mm
Mounting Hole Diameter (D1)	0.31(7.9)	± 0.3mm
Center of SimpleSet Antenna (G1)	0.84(21.3)	± 3.0mm

### Mechanical Diagram

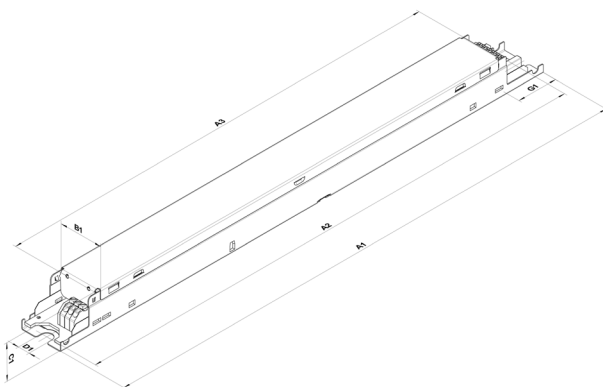

### Wiring Diagram

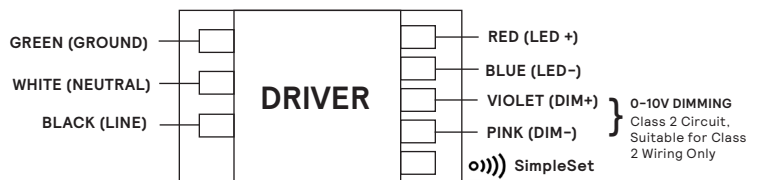

### Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.
- Use 18 AWG Solid Copper Wire Rated  $\geq 90^\circ\text{C}$ .
- Strip Wire 3/8".
- For Class 2 Wiring, Use 20 AWG-16 AWG.

### Grounding

- Driver case must be grounded.



# Xitanium XI075C200V048BPT1

75W 0.1–2.0A 48V 0–10V INT (1% dim) with SimpleSet

## Features

- High efficiency (>86%)
- 1% min. dim level, 0–10V Dimming
- UL Class P

## Benefits

- Allows basic programmability for setting discrete output current levels
- Design flexibility to meet DLC requirements
- Low dimming to cover all major linear applications
- Standard mechanical fit with 360mm Overall Length

## Application

- Indoor Linear troffers, pendants
- Office areas
- Retail Centers
- Educational facilities

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

## Product Data

Order Information	
Full Product Code	XI075C200V048BPT1 (Mid-Pack, 18pcs/Box), 12NC: 929002757313
Line Frequency	50/60Hz
Min. Mains Voltage Operational	108 Vac
Max. Mains Voltage Operational	305 Vac
Output Information	
Maximum Open Circuit Voltage	60Vdc
Output Current Ripple	15% max @ max Iout
Output Current Tolerance (in the performance window)	<5%
Protections	Short Circuit, Open Circuit Protection for LED + and LED -
Features	
0–10V Dimming Interface Current	100–250µA
0–10V Active Range	1V to 8V. See dim curve for details
AOC (Adjustable Output Current)	0.1A–2.0A via SimpleSet (Factory Default at 2.0A)
Additional SimpleSet Configurable Features	Adjustable Minimum dim level Adjustable Output Current (AOC) Adjustable Light Output (ALO) OEM Write Protected features (OWP)
Environment & Approbation	
Operating Ambient Temp. Range	–40°C to +50°C
Max Case Temperature (Tcase)	80°C for life & 85°C for UL safety
Agency Approbations	UL8750, NOM, Class P( cUL, UL)
Electromagnetic Compliance	FCC Title 47 Part 15 Class A
Audible Noise	<24dB Class A
Weight	0.661 Lbs/0.3Kgs

# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

## 0-10V Dimming Interface

Dimming source current from the driver: 100-250µA (@ 0<Vdim<8V)

Minimum Dim Level: 1% of Iout (minimum 10.0mA);


Factory default 1% of Iout setting as default

Maximum output voltage on the dimming wires: 12V

Leakage current of dimming leads: 0.026mA, recommendation of max number of control circuits in parallel can be found in Design-In Guide.

## Approved Dimmer List

Manufacturer	Manufacturer Part Number
Lutron	Visit <a href="http://www.lutron.com/advance">www.lutron.com/advance</a> for a list of dimmers (Mark VII) that will work with this driver
Leviton	IllumaTech IP7 series
Advance	Sunrise - SR1200ZTUNV

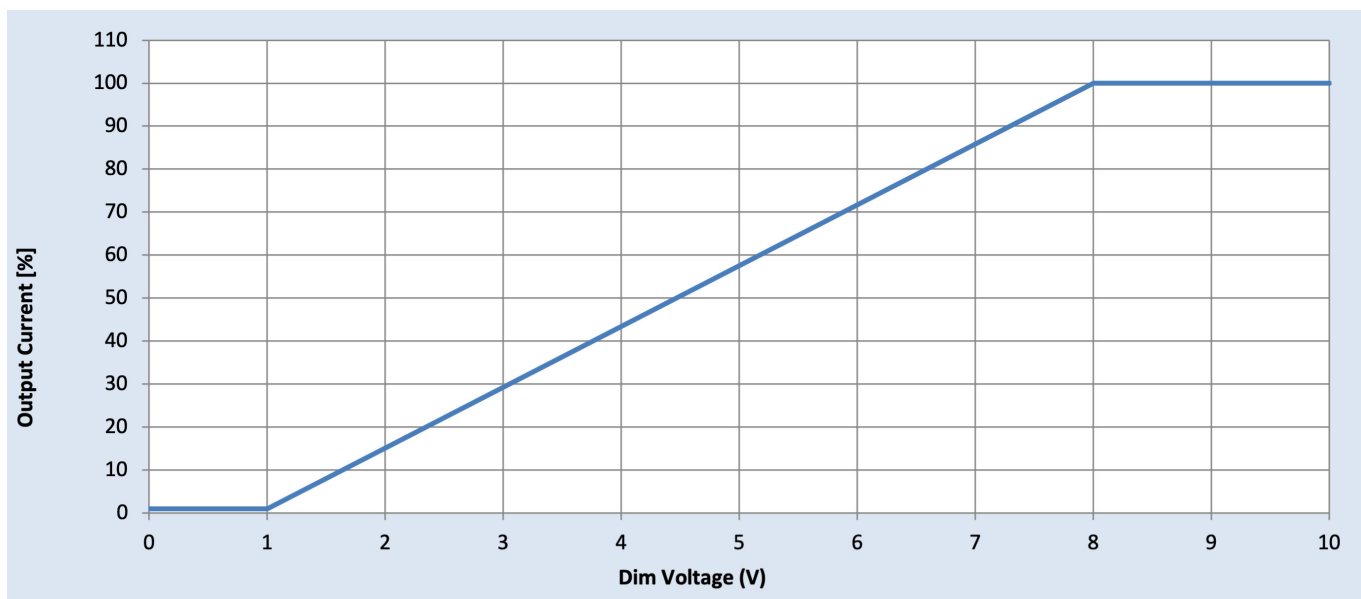


# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet

## Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

## Driver Operation Window:

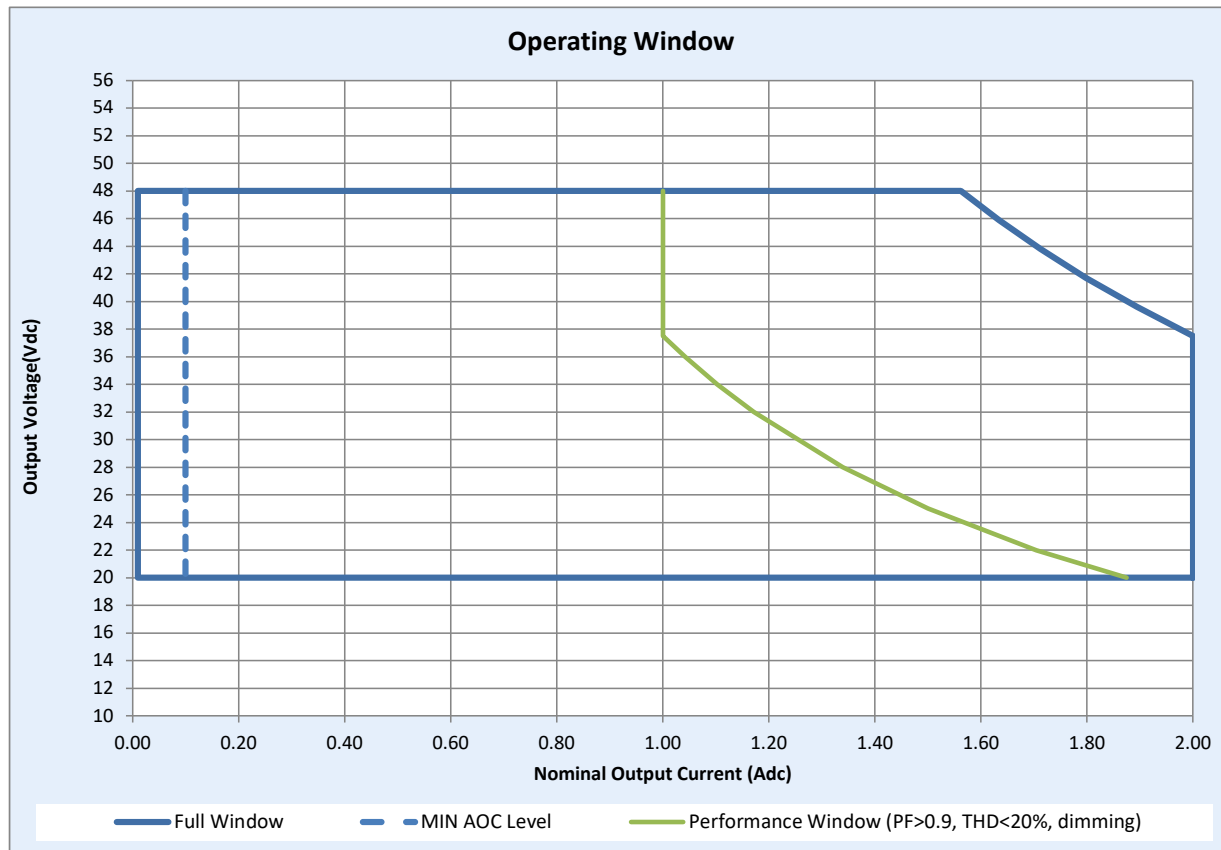

## Notes

1. Factory default output current is 2.0A.
2. To get a 100% to 1% dimming range, the output current setting through AOC should be  $\geq 1.0A$ .
3. Factory default minimum dimming level is 1%. This can be adjusted between 1% and 100% using MultiOne.


# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet

## Electrical Specifications


All the specifications are typical and at 25°C Ta unless specified otherwise

## Output Current Vs. Driver Case Temperature

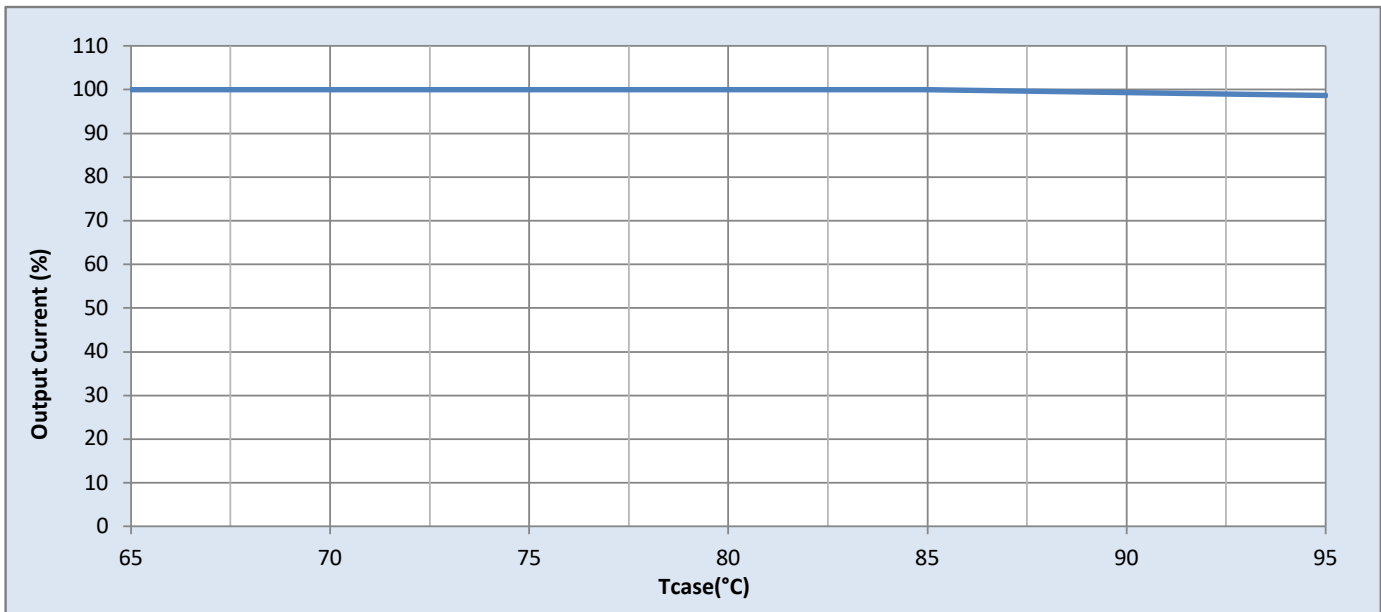

Note: There is  $\pm 5^\circ\text{C}$  tolerance on the driver case temperature

## Driver Lifetime vs. Driver Case Temperature

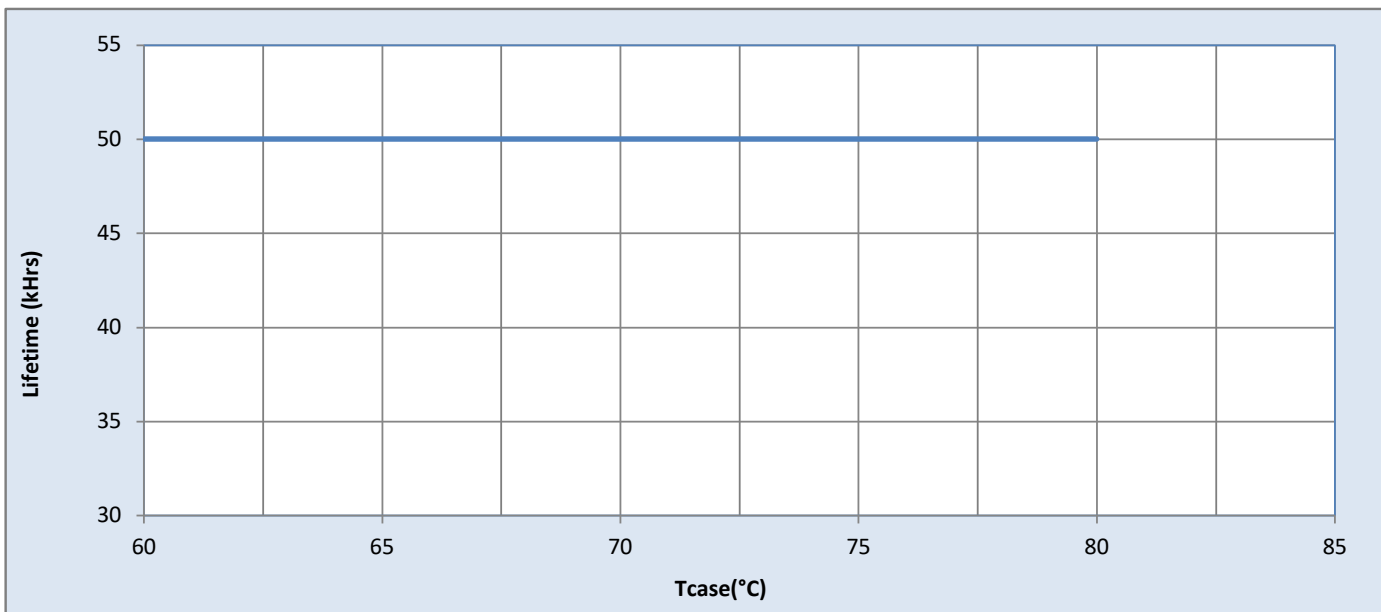


# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet


## Performance Characteristics

Based on measurements on a typical sample at 70°C case. The accuracy of the measurements is within the tolerance of the measurement instruments.

### Efficiency Vs. Output Voltage at 120Vac Input

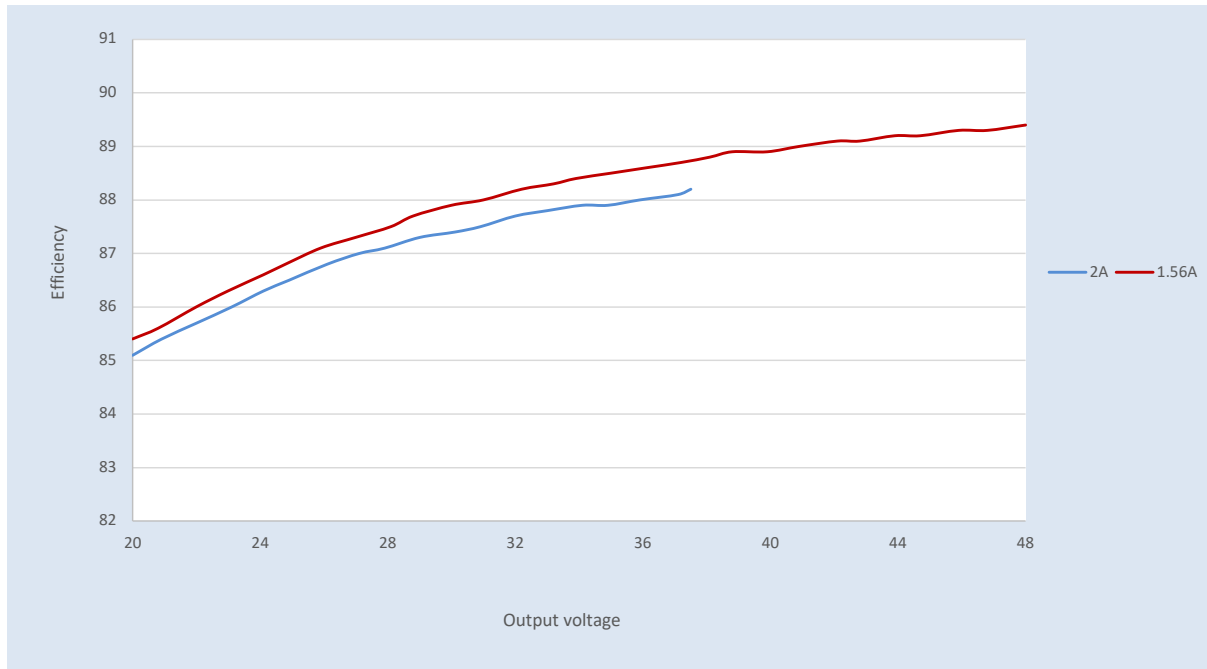

### Efficiency Vs. Output Voltage at 277Vac

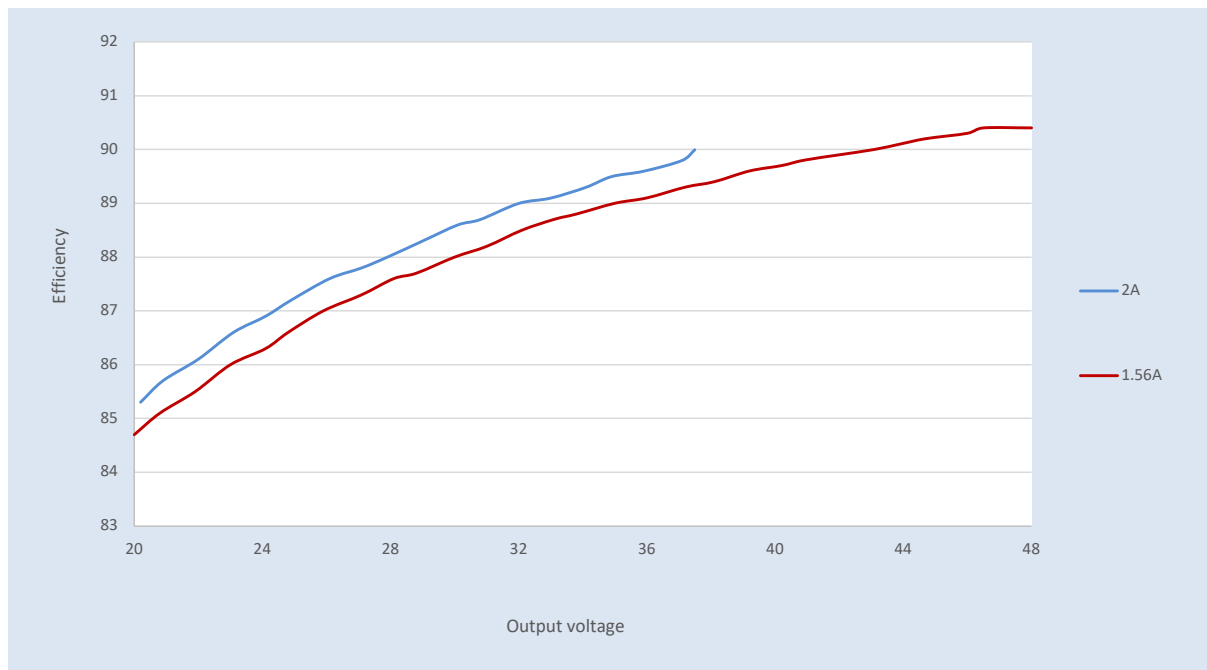


# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet


## Performance Characteristics

Based on measurements on a typical sample at 70°C case. The accuracy of the measurements is within the tolerance of the measurement instruments.

### Power Factor Vs. Output Power

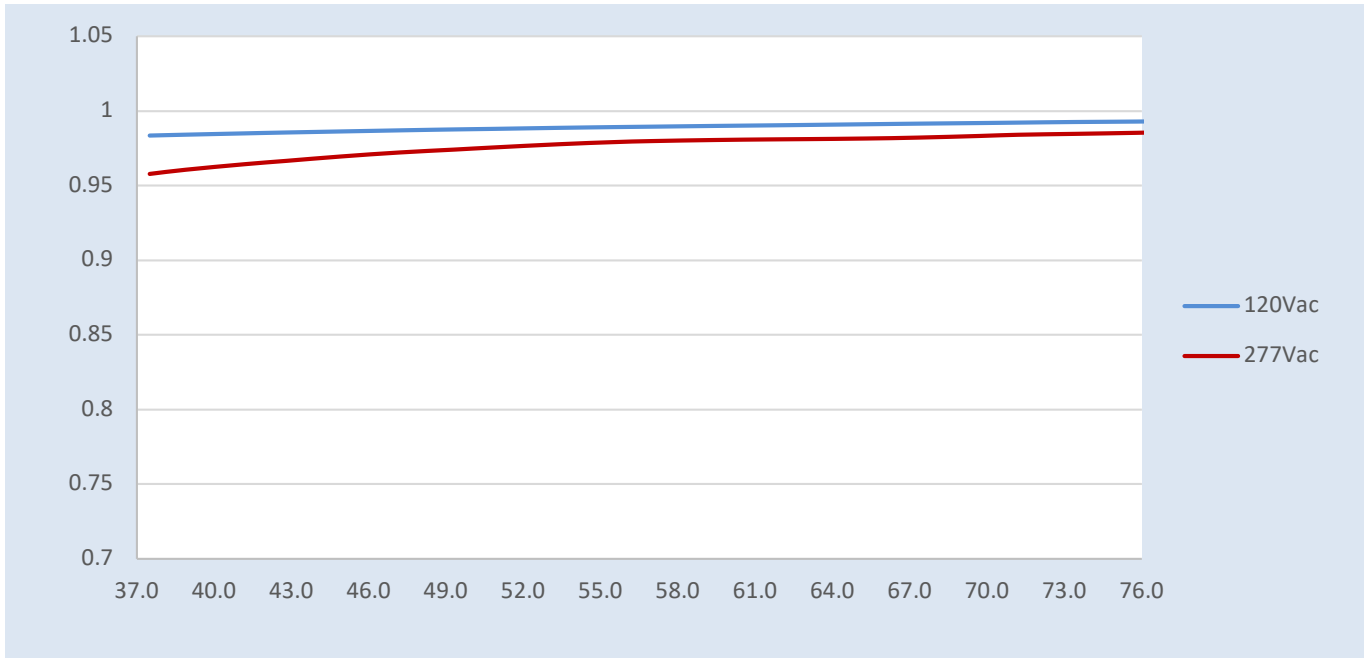


### Total Harmonic Distortion (%)

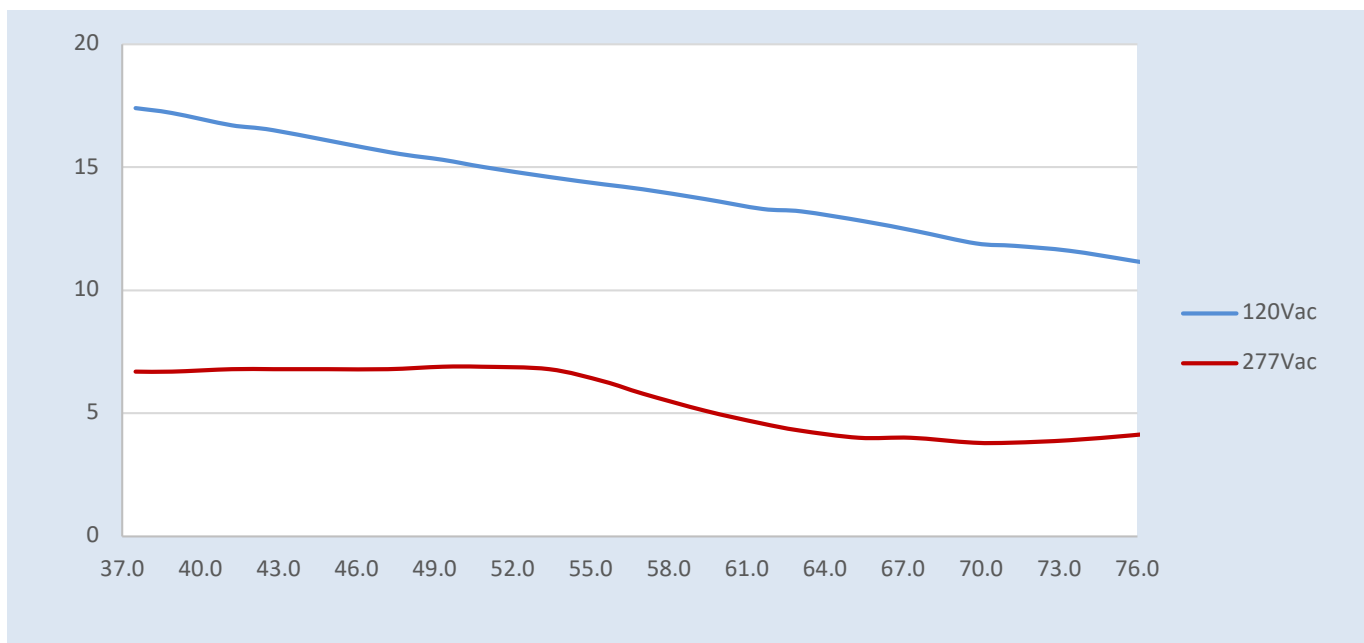

# Xitanium XI075C200V048BPT1

75W 0.1-2.0A 48V 0-10V INT (1% dim) with SimpleSet

## Inrush Current Info

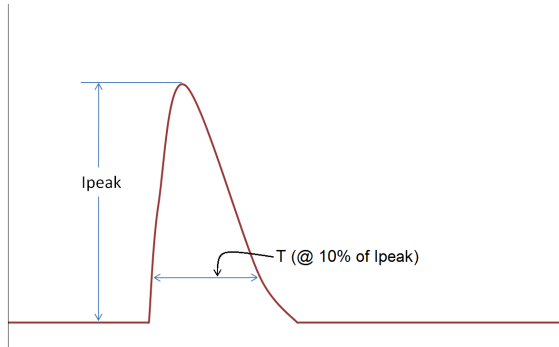

Vin	Ipeak	T (@ 10% of Ipeak)
120 Vrms	17A	8.88μs
277 Vrms	39A	9.1μs

Inrush current is measured at peak of the corresponding line voltage. Source impedance per NEMA 410.

## Lightning Surge Info

ANSI Surge Type	Differential Mode (L-N)	Common Mode (L-G, N-G, L&N-G)
100kHz Ring Wave (w/t 30Ω)	2.5KV	2.5KV

## Isolation

Isolation	Input	Output	0-10V	Enclosure
Input	-	2xU+1kV	2xU+1kV	2xU+1kV
Output	2xU+1kV	-	-	500V
0-10V	2xU+1kV	-	-	500V
Enclosure	2xU+1kV	500V	500V	-

U = Max input voltage

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation  
200 Franklin Square Drive,  
Somerset, NJ 08873  
Telephone 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.