

ADVANCE

by (s) ignify

Xitanium SR





XI040C110V054VPT3

The Advance Xitanium Sensor Ready (SR) LED driver can help reduce complexity and cost of light fixtures used in connected lighting systems for indoor lighting applications. It's D4i certified and features a standard-compliant digital interface to enable direct connection to compatible networked lighting control (NLC) solutions. The minimum dimming level has been improved to be as low as 1%. Advanced lighting control functionalities that ordinarily would require additional auxiliary component are integrated into this driver. The result is a simple, cost-effective lighting fixture that supports the most advanced smart lighting use cases.


Specifications

Input	Output	Output	Output	Efficiency	Max	Input	Max	THD @	Power	Surge	Dimming	Dimming	Min	Drive
Voltage	Power	Voltage	Current	@ Max	Case	Current	Input	Max	Factor	Protect		Range	Dimming	Туре
(Vac)	(W)	(V)	(A)	Load	Temp.	(A)	Power	Load	@ Max	(Combi		(%)	Current	
					(°C)		(W)	(%)	Load	Wave,			(mA)	
					Life/UL					KV)				
120	40	10-54	0.1-1.1	87.0	75 / 85	0.4	46.5	<10	>0.95	2.5	DALL	1-100	2.5	cc
277	40	10-54	0.1-1.1	88.0	757 65	0.17	40.5	<15	>0.95	2.5	DALI	1-100	2.5	


Enclosure

Item	In(mm)	Tolerance (mm)
Overall length (A1)	14.17(359.8)	+/-0.5
Mounting Length (A2)	13.78(350)	+/-0.5
Case Length (A3)	11.87(301.5)	+/-0.5
Case Width (B1)	1.16(29.4)	+/-0.5
Case Height (C1)	1(25.4)	+/-1
Mounting Hole Diameter (D1)	0.31(7.9)	+/-0.3
Center of SimpleSet antenna (G1)	0.84(21.3)	+/-3

Mechanical Diagram

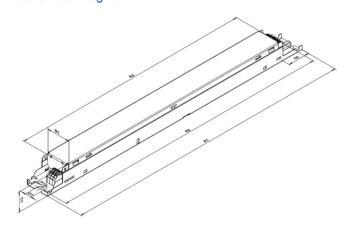

Wiring Diagram



- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.
- Use 18 AWG Solid Copper Wire Rated >= 90 °C.
- Strip Wire 3/8".
- For Class 2 Wiring, Use 20 AWG-16 AWG.
- Driver case must be grounded.











Features

- Standard-compiliant (ANSI C137.4 and DiiA) digital interface
- Integrated DALI bus power supply (part 250)
- Memory bank 1 extension, energy monitoring and diagnostics (part 251, 252, 253)
- Energy metering and advanced diagnostics
- · Continuous dimming down to 1%

Benefits

- Enables interoperability with diverse wireless sensors/network systems
- Reduces cost and complexity of fixture by eliminating auxiliary components ordinarily required for powering sensors, switching fxiture off and monitoring energy use
- Future proof through standard interface to any suitable sensor and ease of adjustable drive current

Application

Indoor linear applications such as troffers and pendants

Logistical data

Specification item	Value
Product name	XI040C110V054VPT3
EOC	XI040C110V054VPT3
Logistic code 12NC	9290 027 66813
Product code	XI040C110V054VPT3M
GTIN	781087171004
Pieces per box	18
Weight	268 gram

All the specifications are typical and at T_{ambient} = 25°C unless specified otherwise

Electrical input data

Specification item	Value	Value	Unit	Condition
Rated input voltage range	108305		V _{ac}	Operating range
Rated input voltage	120	277	V _{ac}	
Rated input frequency	5060	5060	Hz	Performance range
Rated input current	0.4	0.17	Α	@ rated output power @ rated input voltage
Rated input power	46.5	46.5	W	@ rated output power @ rated input voltage
Efficiency	87.0	88.0	%	@ rated output power @ rated input voltage

Electrical output data

Specification item	Value	Unit	Condition
Output voltage	1054	V _{dc}	Class 2 Output
Output voltage max.	60	V	Open Circuit Voltage
Output current	1001100	mA	
Output current min programmable	100	mA	
Min output current	2.5	mA	
Output current tolerance ±	5	%	within performance window
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output power	0.140.0	W	
Minimum performance output power	16	W	Power factor > 0.9 and THD < 20%

Control interfaces

Specification item	Value	Unit	Condition
Control method	DALI		
Dimming range	1100	%	Default range
SR Power Supply max voltage.	20	V	
SR Power Supply max current source	60	mA	
SR Power Supply min voltage	12	V	
SR Power Supply min current source	52	mA	
Communication Protocol	DALI-2, D4i, ANSI C137.4		

IsolationU = Max. working voltage


Isolation per UL-8750	Input	Output	0-10V	Enclosure
Input	-	2U + 1kVac	2U + 1kVac	2U + 1kVac
Output	2U + 1kVac	-	2U + 1kVac	500Vac
0-10V	2U + 1kVac	2U + 1kVac	-	2U + 1kVac
Enclosure	2U + 1kVac	500Vac	2U + 1kVac	-

Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20+50	°C	Higher ambient temperature allowed as long as
			Tcase-max is not exceeded
Tcase-UL	85	°C	Max. temperature measured at T _{case} -point
Tcase-life	75	°C	Meet 50K hour life at Tc life measured at T _c -point

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	50,000	hours	Measured temperature at Tcase-point is Tcase-life

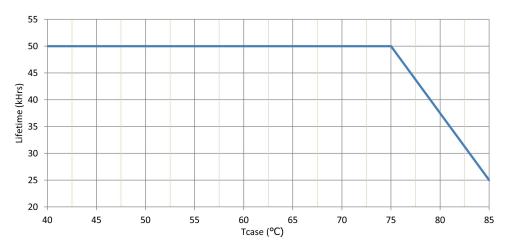

Maximum failures = 10%

Programmable features


Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	NFC, SimpleSet	1100 mA	
Adjustable Light Output (ALO)	Yes		
Adjustable Light Output (ALO) min level	Yes		
Constant Light Output (CLO)	Yes		
Min Dim Level	Yes		
OEM Write Protection (OWP)	Yes		
DALI Power Supply (DALI part 250)	Yes		
Luminaire Info (DALI part 251)	Yes		
Luminaire maintenance (DALI part 253)	Yes		

Non-programmable features

Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Overtemperature protection	Yes	Automatic recovering

Inrush current

Specification item	Value	Unit	Condition
Inrush current	6.2	A	Input voltage 120V
Inrush current	20	A	Input voltage 277V
Inrush peak width	56.6	μs	Input voltage 120 V, measured at 10% height
Inrush peak width	50.8	μs	Input voltage 277 V, measured at 10% height



Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	2.5	kV	ANSI Surge Type 100kHz Ring Wave (w/t 30 ohm)
Mains surge immunity (comm. mode)	2.5	kV	ANSI Surge Type 100kHz Ring Wave (w/t 30 ohm)

Approbation

Specification item	Value	
Approval Marks / Agency Approbations	ClassP(UL cUL) / D4i / NOM / RoHS / SR / UL Listed US & Can	
EMI standards	FCC Title 47 Part 15; Class A	
Environmental protection rating	UL damp & dry	

Graphs


Operating window




Output Current (mA)

- Factory default output current is 1.1A.
 To get a 100% to 1% dimming range, the output current setting through AOC should be ≥ 0.1A.
 Factory default minimum dimming is 1%. This can be adjusted between 1% and 100% using Advance MultiOne.


Over Temperature Protection





Power factor versus output power

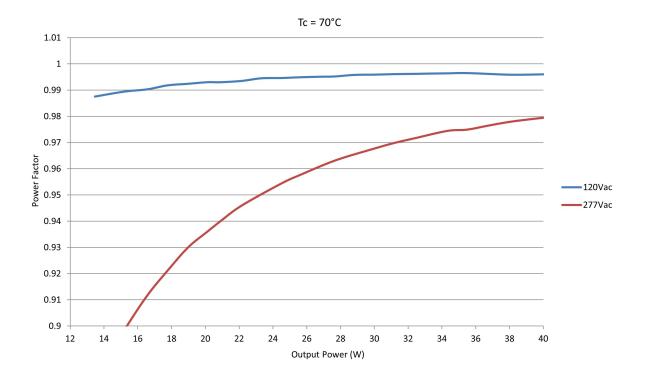

THD versus output power

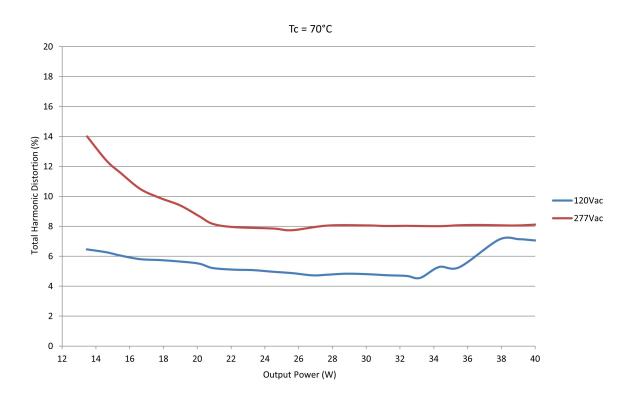

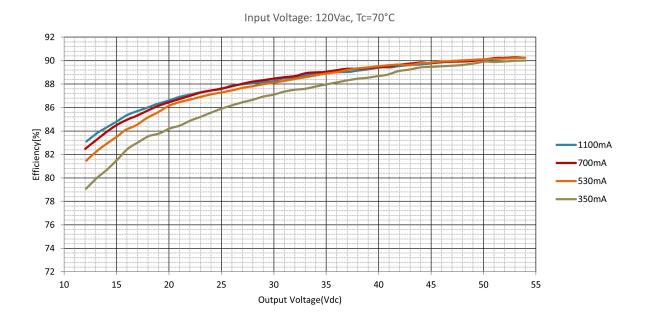


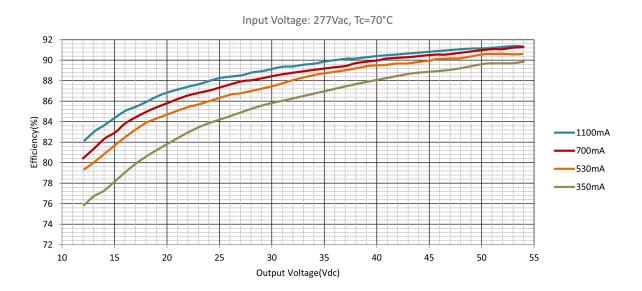


Appendix

DALI Dimming Characteristics

Dimming is accomplished through the 2-wire DALI connection to the sensor. DALi standard IEC62386_102 Edition 2 defines the logarithmic dimming curve. DALI standard IEC62386_107 Edition 1 defines the linear dimming curve as well as the command for switching between logarithmic and linear curves (Default=Logarithmic).

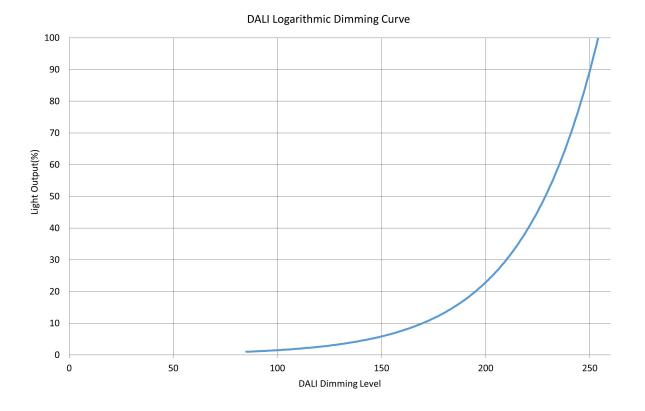

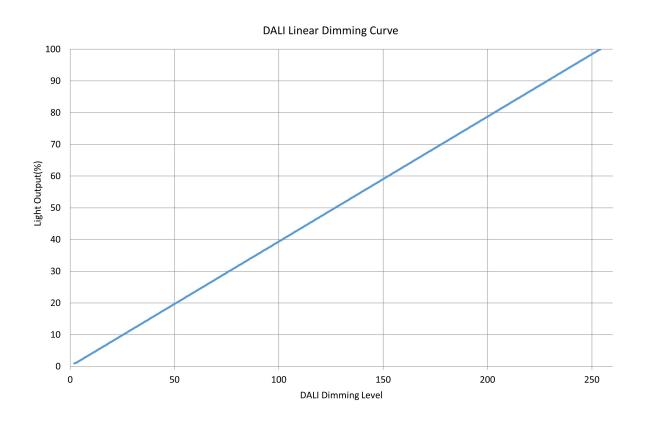

DALI Power Supply Characteristics (Typical)

